


MODIFICACIONES		FECHA
1	Modificado por aumentar el calado de 685 a 700, puntal de 215 a 229 y acortado doble fondo	18-2-63
2	Modificado de acuerdo con la copia del N.º.	18-1-63

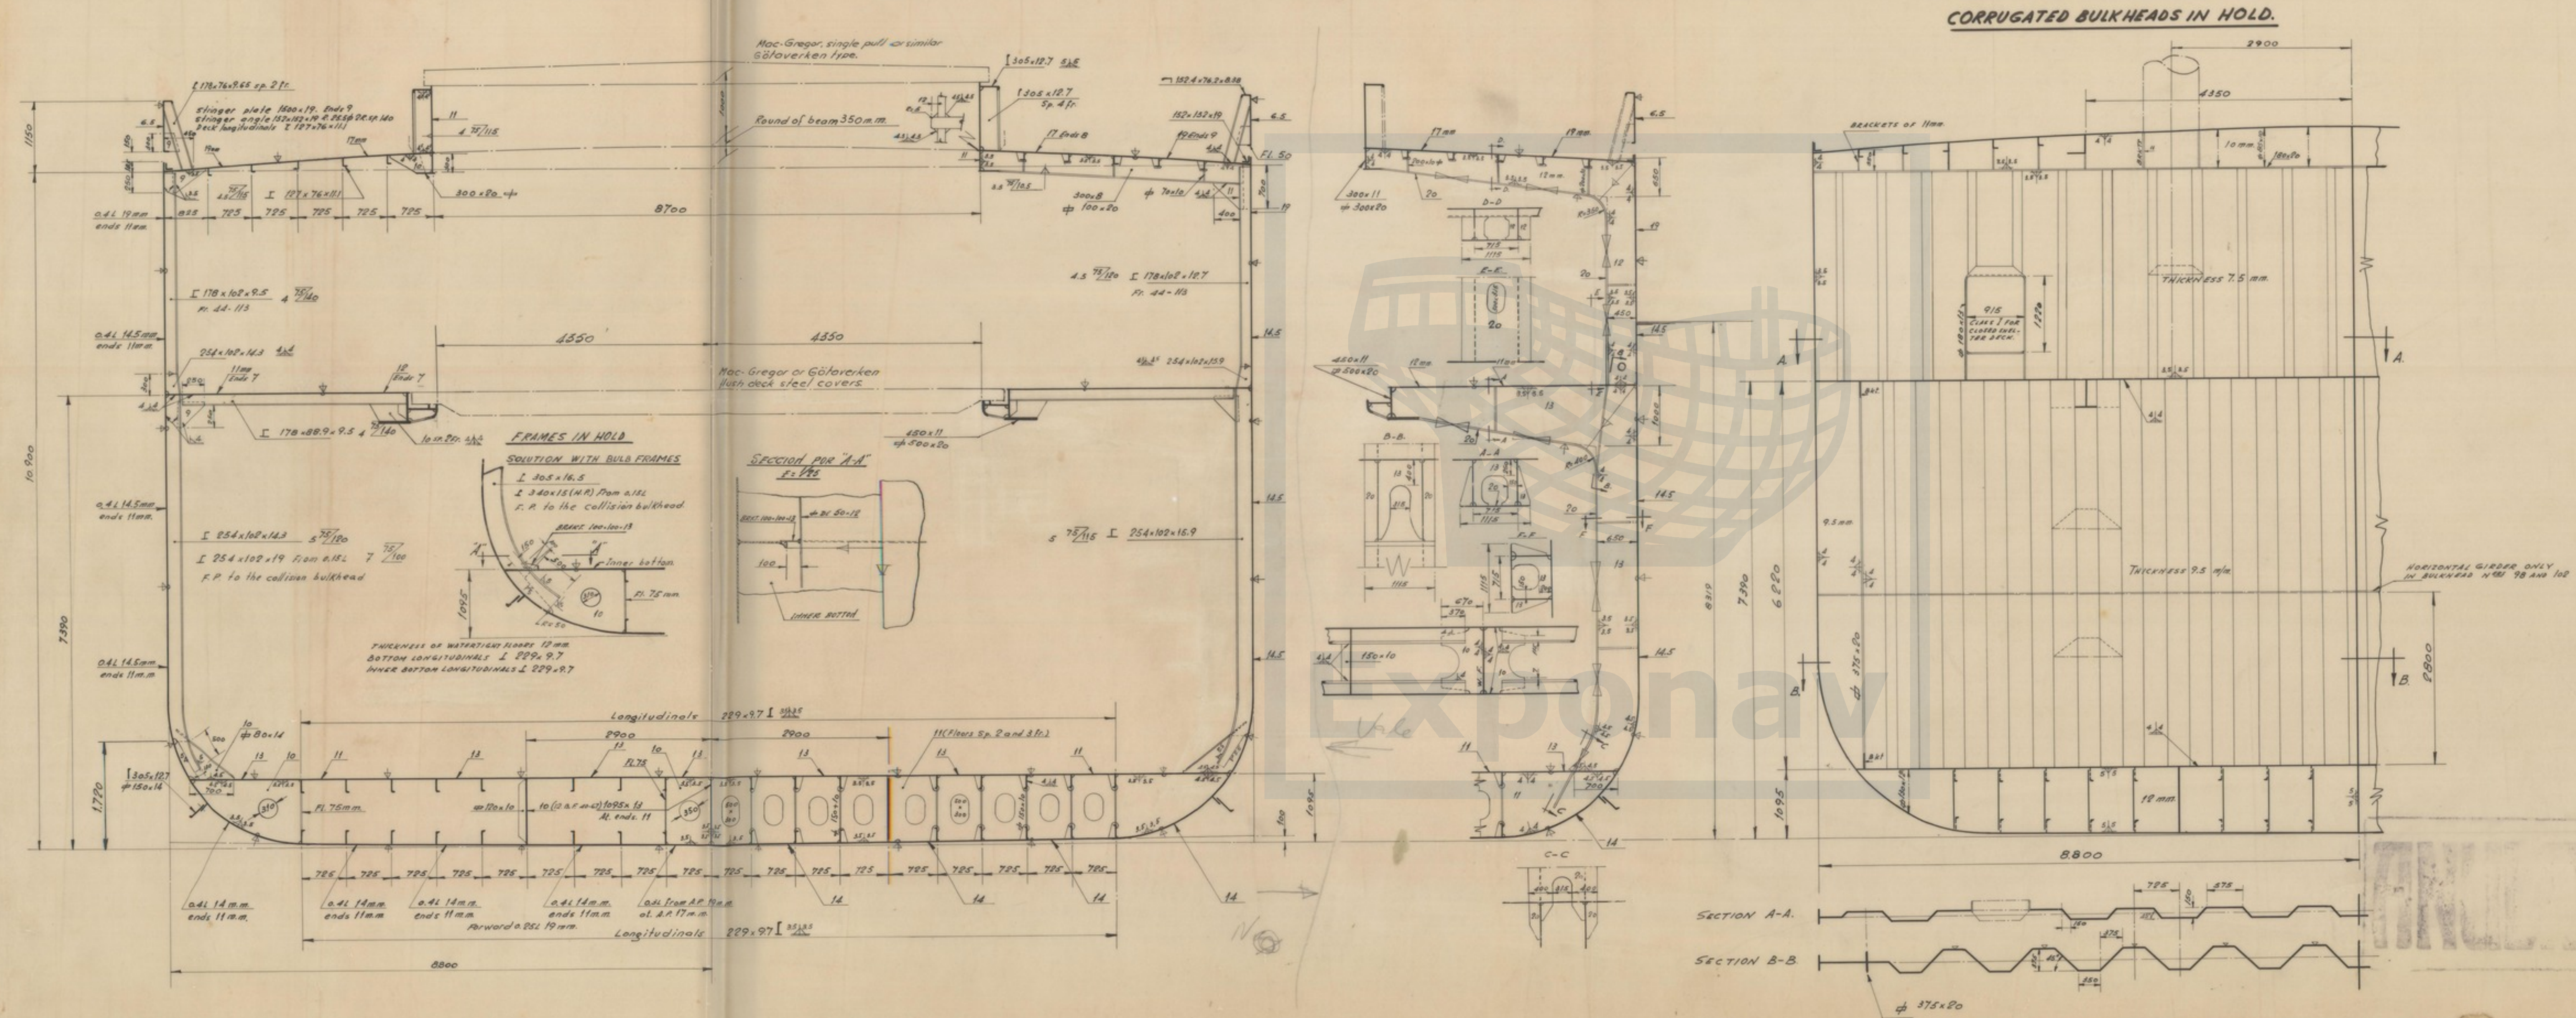

CORRUGATED BULKHEADS IN HOLD.

CHARACTERISTICS.

LENGTH OVERALL	127,200 MTS.
LENGTH BETWEEN PERPENDICULARS	117,400 "
97% OF THE SUMMER LOAD WATERLINE (W.97+121.4)	117,758 "
BREADTH MOULDED	17,600 "
DEPTH TO SHELTER DECK	10,900 "
DEPTH TO MAIN DECK	7,390 "
D.W. AS OPEN SHELTER DECK	6,000 TONS.
CORRESPONDING DRAUGHT	7,000 MTS.
D.W. AS CLOSED SHELTER DECKER	8,300 TONS.
CORRESPONDING DRAUGHT	8,319 MTS.
CLASS + 1A1, 1C.C.	

EQUIPMENT.

EQUIPMENT NUMBER	= 18,220
LETTER	"C"
BOWER ANCHORS (STOCKLESS)	NUMBER = 3 COLLECTIVE WEIGHT = 9882 KGS. LENGTH = 495 MTS.
STUD CHAIN CABLES	DIAMETER = 51 MM (SPECIAL STEEL) LENGTH = 220 MTS.
TOWLINE	MINIMUM BREAKING LOAD = 60,000 KGS.
HAWSERS	NUMBER = 4 LENGTH OF EACH = 165 MTS. MINIMUM BREAKING = 18,000 KGS.

CALECULADO	FECHA 4-4-62	ORDEN	NC-167	SALIDA	El Ingeniero Jefe
DIBUJADO	ESCALA 1:50				
COMPROBADO	<p>OPEN/CLOSED SHELTER DECKER OF 6000/8300 TONS. D.W.</p> <p>MIDSHIP SECTION</p>				
Clasificada por	PR-8913/1				