


## POOP DECK




## BRIDGE DECK

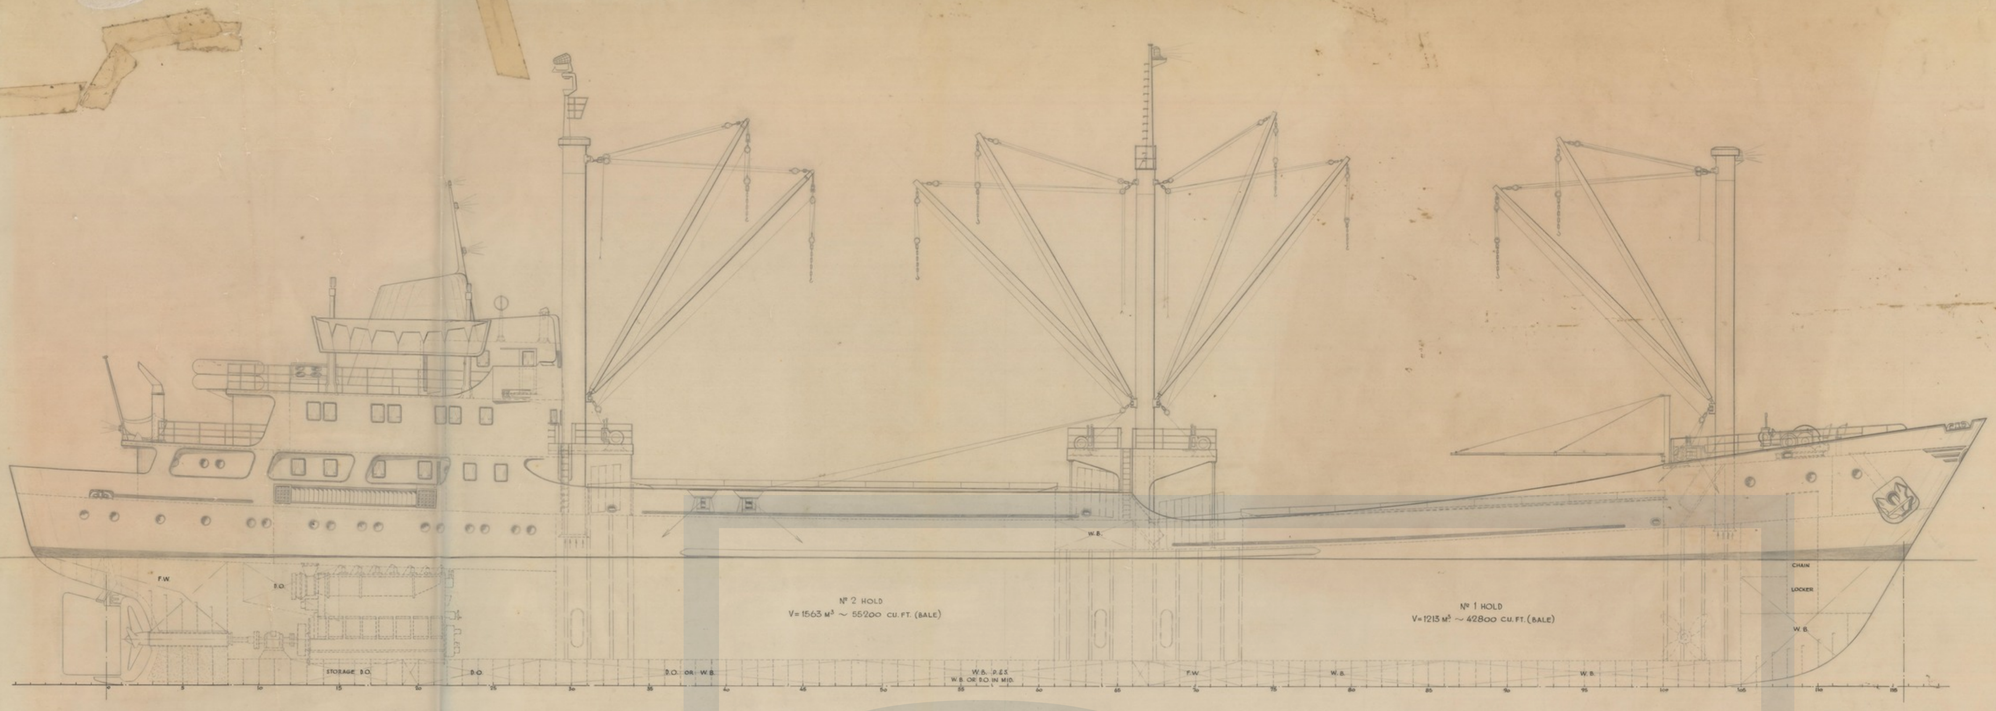


## WINCH'S PLATFORM



## BRIDGE TOP

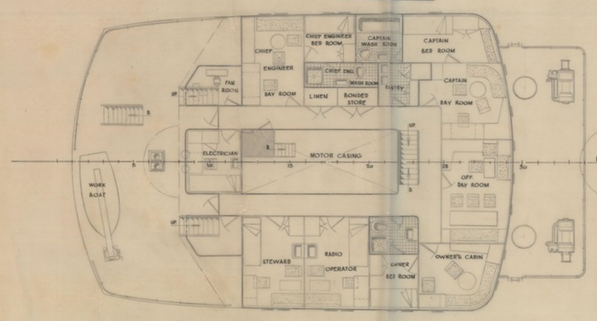

## FORECASTLE DECK

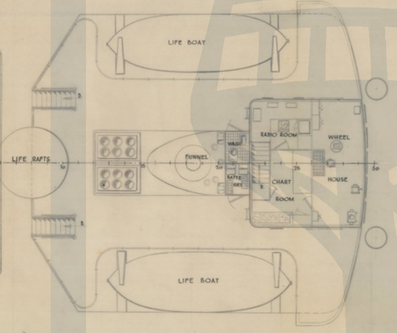

## RAISED QUARTER DECK




## MAIN DECK

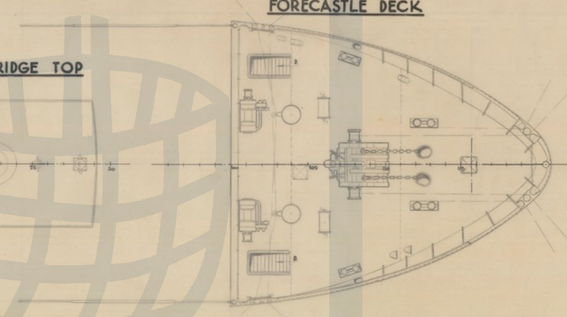


## PLATFORM DECK

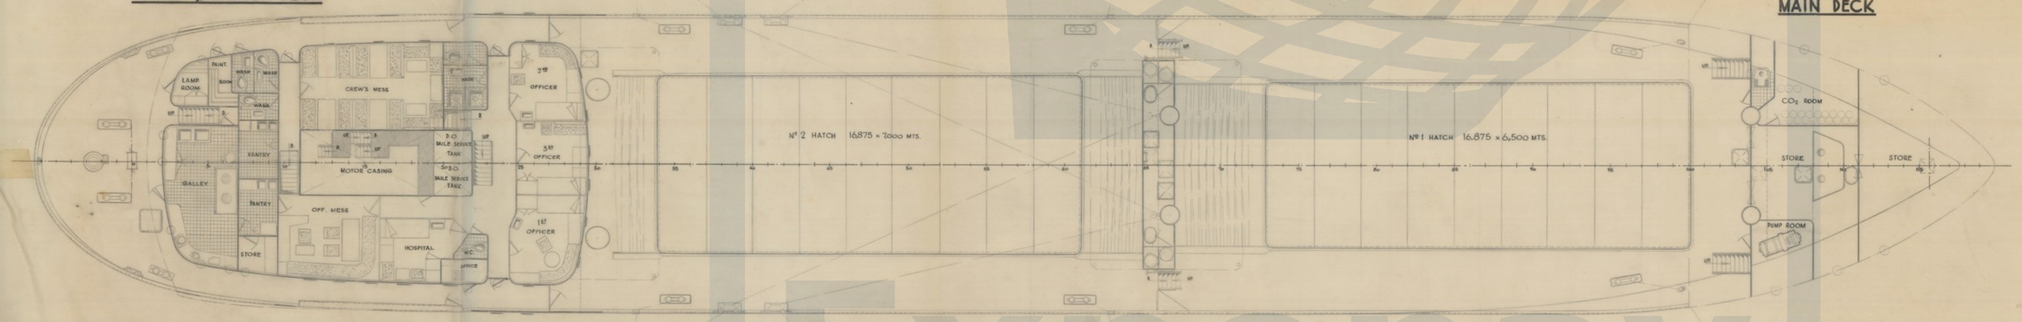


## HOLD




## MAIN CHARACTERISTICS

| | |
|---|---|
| LENGTH OVER ALL | 79,12 MTS |
| LENGTH BETWEEN P.P. | 72,00 " |
| BREADTH MOULDED | 12, 00 " |
| DEPTH | 5,48-6,74 " |
| DRAUGHT WITH TIMBER FREEBOARD | 5,15 " |
| DEADWEIGHT | 2100 TONS. |
| HOLDS - TOTAL BALE | 2896 cu.m. ~ 102270 cu.FT. |
| HOLDS - TOTAL GRAIN | 3064 cu.m. ~ 108210 cu.FT. |
| FRESH WATER | 62 CU.M. |
| DIESEL OIL | 227 " " |
| BALLAST | 519 " " |
| B.H.P. MAXIMUN | 1600 B.H.P. |
| TRIAL SPEED | 12 KNOTS |

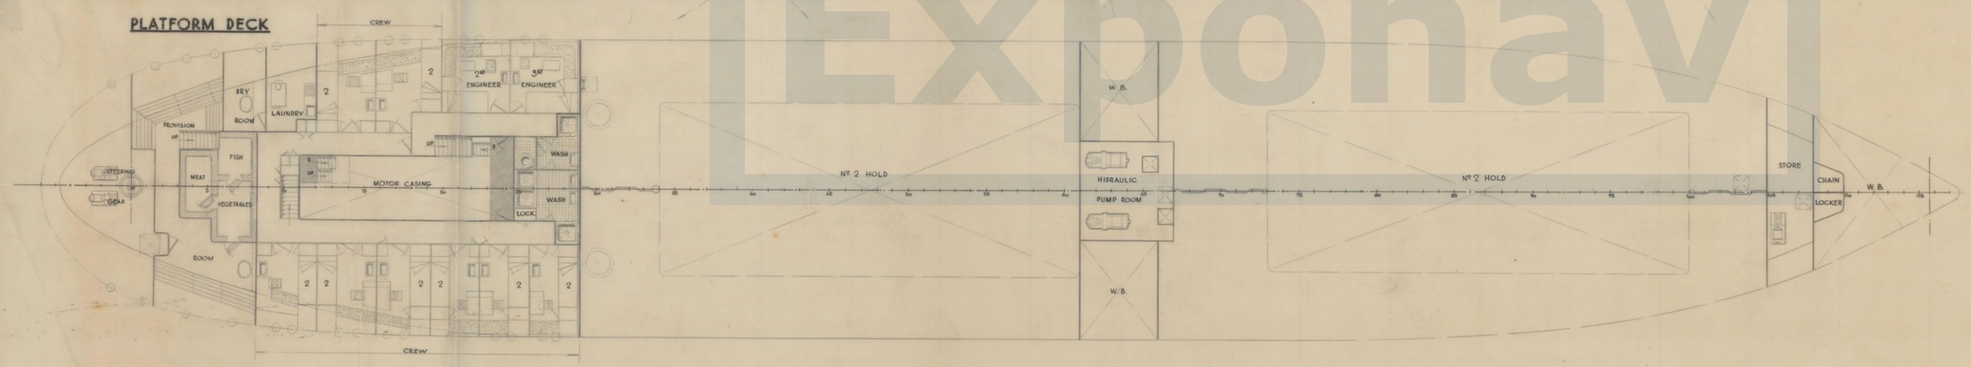Aprobado

| Nº | MODIFICACIONES | FECHA |
|---|---|---|
| G | ENTREGA | |

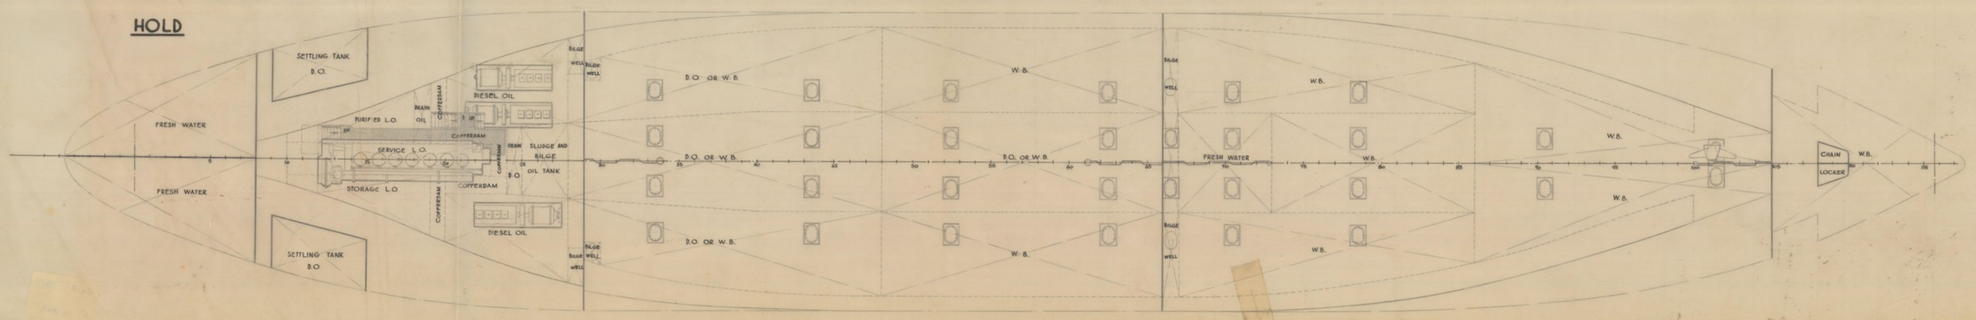CALCULADO

DIBUJADO

COMPROBADO

FECHA 14-3-67

ORDEN P-161-162

ESCALA 1:100

Copia enviada al

SALIDA El Ingeniero Jefe

ASTANO

PLANO Nº PR-2V 04/G

HOJA Nº 1 DE HOJA

Sustituye a

Sustituido por

Clasificada por

V.º B.º

# RAISED QUARTER DECK M.S. OF 2100 TONS. D.W.

# GENERAL ARRANGEMENT

Exponav